


icListen Specification

The new standard in broadband digital marine acoustics

The icListen Smart Hydrophone is a compact, all-in-one instrument that logs calibrated waveforms, spectral or event data in standard formats and can be used to stream real-time data. Use the icListen as a digital hydrophone, acoustic data logger, or both at once.

This compact instrument includes rechargeable batteries, large memory and 24 bit data acquisition system. The icListen detects real-time events and can log or transmit just the event data in real-time.

icListen Self-Noise

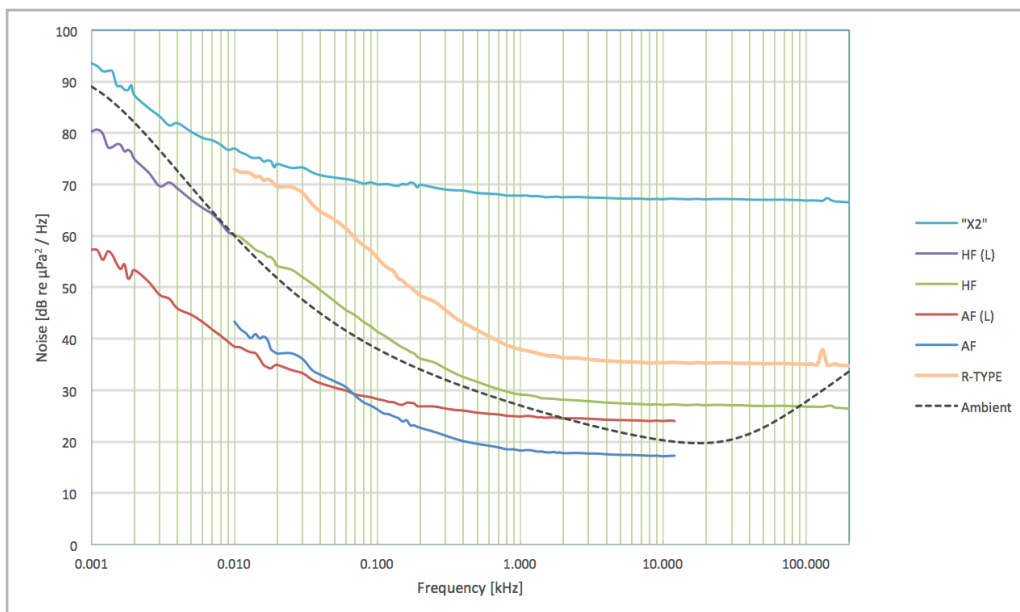

Instrument access methods

- **Stream/Collect** waveform and spectrum (FFT) data.
- Use **Lucy PC software** to view and process data or enquire and set up instrument.

HF and AF

- Use the **Web Browser** to view, real-time acoustic data, instrument status, download logged data, configure instrument settings and put to sleep.
- Use **FTP** to manage files on the instrument copy and delete stored data files, and install firmware upgrades.
- Ethernet or Serial Interface



icListen Models
HF, AF



200m icListen HF
Engineered Plastic



3500m icListen HF
Titanium

Hill House
11 Lornevale Rd., Great Village
Nova Scotia, Canada B0M 1L0
+ 1 902 655 3000

OceanSonics.com

AF(L)	AF	HF(L)	HF	X2	R-TYPE	UNITS
-------	----	-------	----	----	--------	-------

SIGNAL PERFORMANCE

Low Frequency Cutoff	1	10	1	10	1	10	Hz
+/- 3 dB bandwidth	4	4	100	100	100	200	kHz
+/- 6 dB bandwidth	12.8	12.8	200	200	200	N/A	kHz
Sigma Delta Modulator Rate	16.384	16.384	16.384	16.384	16.384	16.384	MHz
Maximum Data Rate	32	32	512	512	512	512	ksps
Minimum Data Rate	1	1	1	1	1	1	ksps
Resolution	16 or 24	16 or 24	16 or 24	16 or 24	16 or 24	16 or 24	bits
Minimum Self Noise	19	18	27	67	39	39	dB re $\mu\text{Pa}^2/\text{Hz}$
Peak Input Level (μPa)	166	165	175	215	182	182	dB re μPa
Peak Input Level (Volts)	6	6	6	6	6	6	dBV
Voltage Sensitivity	-160	-159	-169	-209	-176	-176	dBV re μPa
Digital Sensitivity, 24-bit, $\text{count}^2 / \mu\text{Pa}^2$	-31	-30	-40	-77	-47	-47	dB
Digital Sensitivity, 16-bit, $\text{count}^2 / \mu\text{Pa}^2$	-79	-78	-88	-128	-95	-95	dB
Dynamic range, 1.0 Hz BW	147	147	148	148	146	146	dB
Dynamic range, Spectrogram, Full BW	132	132	121	121	119	119	dB
Full Bandwidth Dynamic Range	106	1t06	95	95	90	90	dB

SOFTWARE / INTERFACE

Communications Interface	Ethernet	Ethernet	Ethernet	Ethernet	
	RS-422	RS-422	RS-422	RS-422	
Lucy Software Support	Yes	Yes	Yes	Yes	
Collect Data Protocol	Serial / TCP	Serial / TCP	Serial / TCP	Serial / TCP	
Streaming Data Protocol	TCP / UDP	TCP / UDP	TCP / UDP	TCP / UDP	
Web Server (HTTP)	TCP	TCP	TCP	TCP	
FTP, SFTP and SSH Console	TCP	TCP	TCP	TCP	
Maximum Internal Data Storage	128	128	128	128	GB

POWER

Internal Battery Life ^C	10	10	10	10	Hours
Metalic Lithium Equivalent Content	780	780	780	780	mg
Recommended Supply Voltage	18 - 36	18 - 36	18 - 36	18 - 36	V
Supply Voltage Limits	15 - 48	15 - 48	15 - 48	15 - 48	V
External Power (min, no networking)	1.8	1.8	1.8	1.8	W
External Power (typical)	2.1	2.1	2.1	2.1	W
External Power (charging)	3.8	3.8	3.8	3.8	W

MECHANICAL

Mass (Titanium Case)	1056	911	911	-	gm
Mass (Plastic Case)	540	445	445	478	gm
Volume (Displacement)	354	317	317	332	cm^3
Overall Length, including connector	256	258	258	318	mm
Sensor Element Length	59	61	61	117	mm
Body (Can) Length	165	165	165	165	mm
Element Diameter	38	22	22	16	mm
Body Diameter	48	48	48	48	mm

Notes:

- A. No internal logging above 4 ksps.
 B. dBSR is the ratio of Sensitivity in dB to a reference sensitivity. (see our white paper on Digital Hydrophone Sensitivity.)
 C. Initial battery life. Battery life will decrease by about 20% per year.

