

Teledyne RD Instruments

Workhorse Quartermaster

150 kHz ADCP

Versatile Precision


Teledyne RD Instruments' WORKHORSE QUARTERMASTER Acoustic Doppler Current Profiler (ADCP) has been designed to fill the gap between Teledyne RDI's higher frequency 300 kHz Workhorse units and the 75 kHz Long Ranger. The Quartermaster is ideally suited for current profile measurements that may require up to 300m range. The unit provides an unsurpassed combination of range, resolution, and versatility, thanks to Teledyne RDI's Broadband technology.

The highly flexible Workhorse Quartermaster is available in two product configurations: self-contained (Sentinel), and direct-reading (Monitor). The Quartermaster is ideally suited for:

- Ocean observatories
- Shelf-edge profiling
- Upper ocean dynamics

Third-party solutions

Collect data at your desk: the Quartermaster can operate in real-time or stored-data mode. Third-party products are available for delivery of data via an acoustic modem and radio data transfer direct to your desktop.

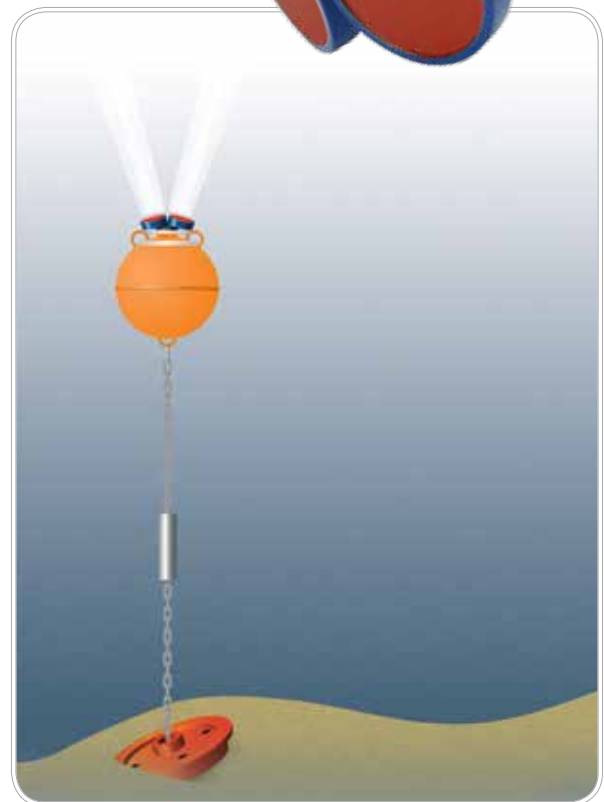

PRODUCT FEATURES

- **Versatility:** The highly versatile Quartermaster offers ranges of up to 300m, as well as self-contained and direct read configurations.
- **Precision data:** Teledyne RDI's Broadband signal processing produces high-resolution, precise measurements without compromising battery life.
- **Reliability:** Set it and forget it; the highly reliable and energy-efficient Quartermaster can be deployed for three, six, or even twelve months of worry-free operation.
- **4-beam solution:** Teledyne RDI's patented 4-beam design provides a redundant data source in case of a blocked or damaged beam, as well as an independent measure known as error velocity to ensure the quality of the data.



Workhorse Quartermaster



150 kHz ADCP

TECHNICAL SPECIFICATIONS

Mode	Depth Cell Size	Std. Dev. ¹	First Cell Range ²	Maximum Range ^{3,4,5}
High Resolution	4	7.0cm/s	8.9m	200m
	8	3.5cm/s	12.8m	235m
	16	2.0cm/s	20.6m	255m
	24	1.0cm/s	28.4m	270m
Long Range	4	14.0cm/s	8.8m	275m
	8	7.0cm/s	12.7m	300m
	16	3.6cm/s	20.5m	325m
	24	2.5cm/s	28.7m	340m
Bottom Track	N/A	N/A	N/A	480m
Profile Parameters	Velocity accuracy	± 1% ± 5mm/s		
	Velocity resolution	1mm/s		
	Velocity range:	± 5m/s default, ± 10m/s max		
	Depth cell size	2–24m		
	Number of depth cells	1–255		
	Ping rate	1Hz (typical)		
Echo Intensity Profile	Vertical resolution	Depth cell size, user configurable		
	Dynamic range	70dB		
	Precision	±1.5dB (relative measure)		
Transducer and Hardware	Beam angle	20°		
	Beam width	4°		
	Configuration	4-beam, convex		
	Internal memory	Two PCMCIA card slots; one memory card included		
	Communications	RS-232 or RS-422; ASCII or binary output at 1200-115,400 baud		
Power	DC input	20–50VDC. Standard configuration includes 2 alkaline batteries.		
	Number of batteries	Select from 0, 2, or 4 battery pack configurations		
	Internal battery voltage	42VDC (new) 28VDC (depleted)		
	Battery capacity @ 0°C	450 watt hrs typical / 900 or 1800 watt hours total		
Standard Sensors	Pressure sensor	Maximum range 2000m		
	Pressure accuracy	0.25% of full scale		
	Temperature (mounted on transducer)	Range -5° to 45°C, Precision ±0.4°C, Resolution 0.01°		
	Tilt	Range ±15°, Accuracy ±0.5°, Precision ±0.5°, Resolution 0.01°		
	Compass (fluxgate type, includes built-in field calibration feature)	Accuracy ±2°, Precision ±0.5°, Resolution 0.01°, Maximum tilt ±15°		
Environmental	Depth rating	1500m (3000/6000m optional)		
	Operating temperature	-5° to 45°C		
	Storage temperature without batteries	-30° to 60°C		
	Weight in air	SC (2 BP) 56kg, SC (4 BP) 70kg, DR (0 BP) 41kg, ExtBC (4 BP) 39kg		
	Weight in water	SC (2 BP) 43.4kg, SC (4 BP) 50kg, DR (0 BP) 36kg, ExtBC (4 BP) 15.3kg		
Software	Use Teledyne RDI's Windows™-based software for the best results: WinSC —Data Acquisition; WinADCP —Data Display and Export; Teledyne RDI Tools —Utilities; Velocity			
Available Options	<ul style="list-style-type: none"> • 3000m and 6000m depth option • External battery case • Mooring accessories: in-line and bottom-mount accessories • Remote head configurations • Memory: 2 PCMCIA slots, total 4GB 			
Dimensions	488.14 mm wide x 473.91mm long (Monitor); 751.71mm long (2-battery Sentinel); 994.71mm long (4-battery Sentinel) <i>(line drawings available upon request)</i>			

1 Standard deviation is ADCP uncertainty given a single ping.
 2 The first cell range is the distance from the transducer to the center of the first cell.
 3 Maximum range is a nominal value based on 5°C, 35ppt, and typical ocean backscatter; actual range will vary depending on environmental conditions.
 4 Assuming the ADCP is pointed vertically (0° tilt), the maximum range is limited to 94% of the distance to the surface.
 5 Assumes a power supply of 32VDC (typical average battery voltage).
 6 <±1.0° is commonly achieved after calibration.

Specifications subject to change without notice.
 © 2009 Teledyne RD Instruments, Inc. All rights reserved. MM-1019, Rev. Feb. 2013.



Teledyne RD Instruments
 14020 Stowe Drive, Poway, CA 92064 USA
 Tel. +1-858-842-2600 • Fax +1-858-842-2822 • Email: rdisales@teledyne.com
 Les Nertieres 5 Avenue Hector Pintus 06610 La Gaude France
 Tel. +33-49-211-0930 • Fax +33-49-211-0931 • Email: rdie@teledyne.com